

NEW

# YM225 YM232 YM238

	YM225	YM232	YM238
Ideal Acreage		25-45 acres	
Engine HP	24.4 HP	31.8 HP	38.2 HP
Loader Lift Capacity		1,500 LBS.*	
Transmission	Synchronized Reverser Transmission (SRT)		

\*lift capacity to maximum height at pivot pin



# YM2 SERIES

## HIGH LOADER LIFT CAPACITY (1500LBS @PIN)

- Serious strength in a compact package
- Great for material handling where it would be difficult to maneuver with a larger tractor
- Add the optional 3rd function hydraulic kit to power attachments like a grapple for even more productivity

## 8X8 GEAR SRT (SYNCHRO-REVERSE TRANSMISSION)

- Simple, durable, efficient
- The synchronized forward/reverse shift, located conveniently on the column, makes changing direction a breeze! Ideal for loader work and other operation that requires frequently changing direction

## MAKE IT YOUR OWN!

- Loader
- Canopy kit
- Deluxe suspension seat
- LED work light
- Backhoe
- Single spool rear remote
- 3rd function kit

## \*TURBO

Elevate your tractor to a high-performance machine with the YM238 Turbo!

- Increased power
- Greater fuel efficiency
- Improved performance
- Reduced emissions
- Improved torque
- Less noise
- Better performance at high altitudes




**NEW**

TURBO ENGINE AVAILABLE ON YM238.



INFORMATIVE DISPLAY PANEL.

# YM225 YM232 YM238 TRACTOR

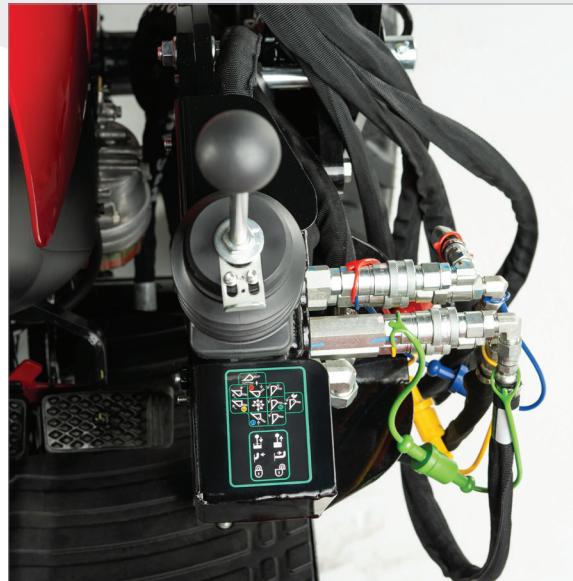

LOADER CONTROLS FOR EASE OF LIFTING UP TO 1,500 LBS AT THE PIVOT PINS.

**SPECIFICATIONS**

	YM225	YM232	YM238			
Ideal Acreage	25-45 acres					
Engine HP	24.4 HP (18.2 kW)	31.8 HP (23.7 kW)	38.2 HP (28.5 kW)			
Transmission	Synchronized Reverser Transmission (SRT)					
<b>WARRANTY COVERAGE</b>						
Tractor*	24 months or 2,000 hours (whichever comes first)					
Powertrain*	10 years or 3,000 hours (whichever comes first)					
*for non-commercial, home and residential use only						
<b>POWERTRAIN</b>						
Engine Manufacturer	Yanmar					
Engine Gross Power	24.4 HP (18.2 kW)	31.8 HP (23.7 kW)	38.2 HP (28.5 kW)			
PTO Power	18.5 HP (13.8 kW)	25.5 HP (19.0 kW)	31.9 HP (23.8 kW)			
Rated Engine Speed	2,400 RPM	2,600 RPM	2,600 RPM			
Clutch	Dry Single Plate					
<b>CAPACITIES</b>						
Fuel Tank	10.5 gal. (40.0 L)					
<b>DRIVETRAIN</b>						
Transmission Type	Synchronized Reverser Transmission (SRT)					
Rear Differential Lock	Foot Pedal Engagement					
2WD/4WD Engagement	Selectable					
PTO Type	Transmission Driven with Overrunning Clutch					
Rear PTO Speed	540 RPM @ 2,360 rpm					

	YM225	YM232	YM238
<b>HYDRAULICS</b>			
Pump Capacity (Steering)	3.8 GPM (14.5 L/min)	4.1 GPM (15.7 L/min)	4.1 GPM (15.7 L/min)
Pump Capacity (Implement)	6.2 GPM (23.8 L/min)	6.8 GPM (25.8 L/min)	6.8 GPM (25.8 L/min)
3-Point Hitch	Category 1		
3-Point Lift Capacity (Std.)	2,205 lbf. (1,000 kgf)		
3-Point Lift Capacity at 24" (61 cm)	1,609 lbf. (730 kgf)		
Remote Valve	Optional		
3rd Function Valve	Optional		
<b>DIMENSIONS AND WEIGHT</b>			
Minimum Ground Clearance	10.6" (269 mm)		
Total Weight	2,800 lb. (1,270 kg)	2,866 lb. (1,300 kg)	2,866 lb. (1,300 kg)
<b>FRONT END LOADER</b>			
Maximum Lift Height to Pivot Pin	88.3" (2,578 mm)		
Lift Capacity to Maximum Height at Pivot Pin	1,500 lb. (682 kgf)		
Breakout Force at Pivot Pins	2,500 lb. (1,134 kgf)		



To learn more or  
find a dealer nearest  
you, please visit  
[YanmarTractor.com](http://YanmarTractor.com)

YANMAR has a corporate policy of continuous product improvement and development; therefore data, specifications, and warranty are subject to change without any advance notice. There may be differences between the specifications and illustrations contained in this publication and the actual equipment. Equipment components produced by other manufacturers may be shown in photographs in this publication for the purpose of illustration only and is not intended as an endorsement of that particular equipment or its suitability. Inspect equipment before using it and be sure it is operating properly. The product depictions are not meant to be used or relied upon as a substitute for the safety and use information that is published in the respective operator's manual. Before operating a machine, read, understand, and follow all instructions of the manual and on the machine. YANMAR disclaims all representations, express or implied, or any liability from the use of this publication.